




Start by removing the back cushions and ratchet back cushions from the main sofa.

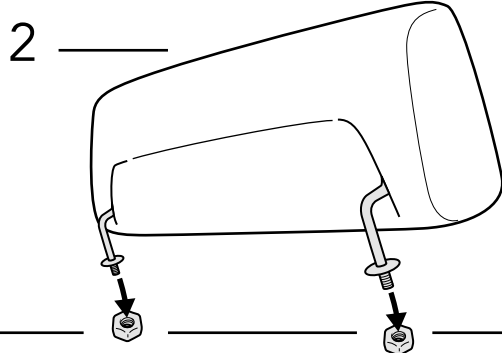


Remove the nuts from the ratchet back cushion.

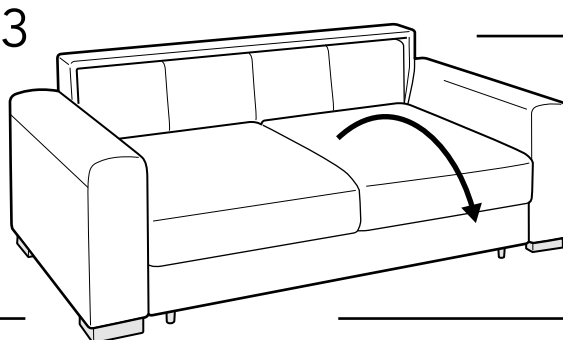


Open the bed mechanism.

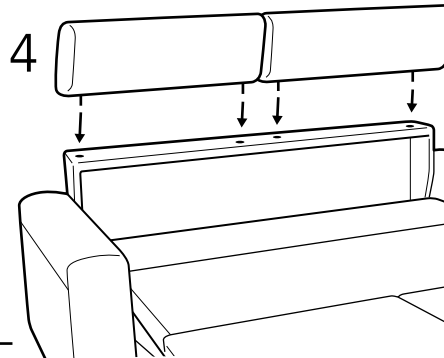

Insert the right and left ratchet back into the pre-drilled holes.

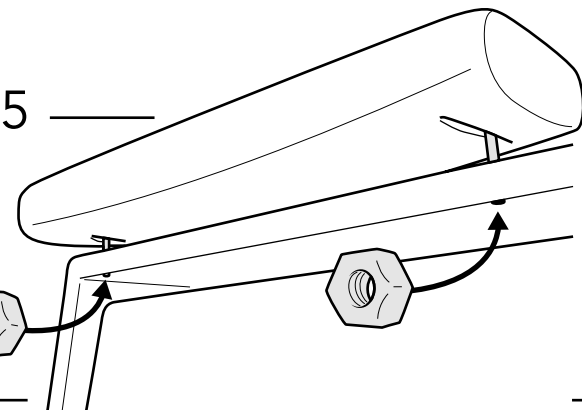

Tighten ratchet back cushion to the back frame with nuts.

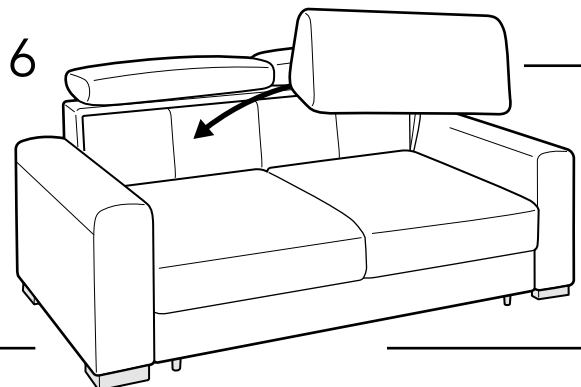

Finally, insert the back cushion.